


VULKOLLAN FLAP WHEELS

These flap wheels are produced with VULKOLLAN flaps glued around a central balanced aluminium core.

They are manufactured with different shores according to the type of abrasive belts or grain to be used.

Thanks to their flexibility, these wheels are particularly suitable for shaped parts and give high abrasive performance.

They are mainly used for grinding operations with rougher grain when it is necessary high material removal.

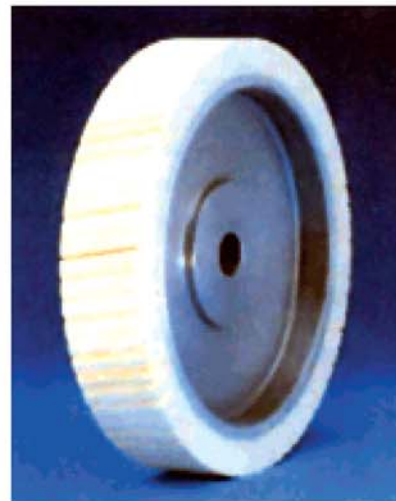

STANDARD DIMENSIONS		
OUTER Ø	AVAILABLE THICKNESSES	AVAILABLE SHORE
150	30-40-50-60-70-80-90-100	20/25 - 30/35
200	30-40-50-60-70-80-90-100	20/25 - 30/35
250	30-40-50-60-70-80-90-100	20/25 - 30/35
300	30-40-50-60-70-80-90-100	20/25 - 30/35
350	30-40-50-60-70-80-90-100	20/25 - 30/35